



## AC/DC SLOT TYPE INDUCTIVE PROXIMITY SENSORS


30mm

○

-

PBT

●

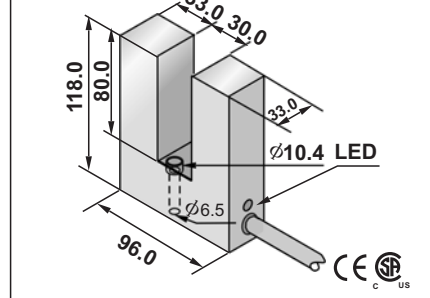

20~250VAC,50-60Hz;20~250VDC

-

≤1.8mA

≤400mA

<1.8mA

5A at 20ms

≥5mA

<10V AC ; <8V DC

25HZ AC ; 40HZ DC

Approx. 60% Insert depth

<15%(Sr)

<2.0%(Sr)

IP67

-25°C to 70°C

<±%10(Sr)

45mmx45mmx1mm

-

-

RFI>3V/m / EFT>1KV / ESD>4KV (contact)

IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2

UUP2-U3080A-A2L2 9

UUP2-U3080A-B2L2 10

UUP2-U3080U-A2L2 9

UUP2-U3080U-B2L2 10

5.8φ2X0.5

approx.280g

Note:

Coming Soon : Part numbers with underline  
In Preparation: Part numbers with a line through the middle