AC/DC 2-WIRE HIGH TORQUE, STANDARD SENSING RANGE (SHORT BODY)

M30			M30			M30		
●	○		●	○		●	○	
10.0	15.0		10.0	15.0		10.0	15.0	
Nickel plated brass			Nickel plated brass			Nickel plated brass		
●			●			●		
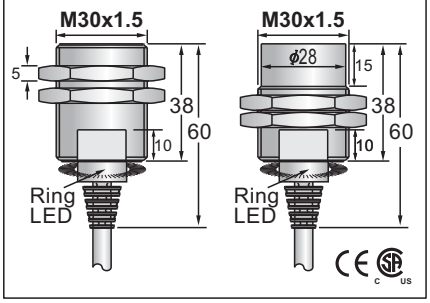			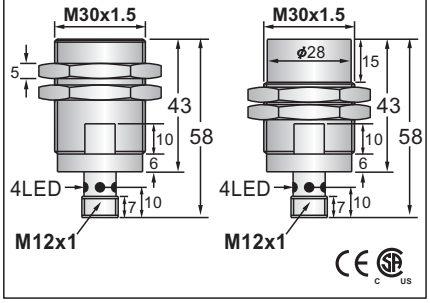			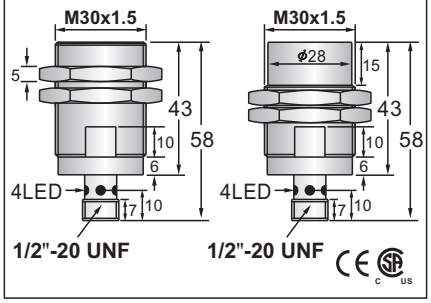		
20-250 V AC/DC			20-250 V AC/DC			20-250 V AC/DC		
30x30x1 mm	54x54x1 mm		30x30x1 mm	54x54x1 mm		30x30x1 mm	54x54x1 mm	
25 Hz			25 Hz			25 Hz		
1.7mA max.			1.7mA max.			1.7mA max.		
5... 300mA max.			5... 300mA max.			5... 300mA max.		
⩽ 15% of sensing distance			⩽ 15% of sensing distance			⩽ 15% of sensing distance		
IP67			IP67			IP67		
Operating:-25°C to 70°C			Operating:-25°C to 70°C			Operating:-25°C to 70°C		
Operating: 35% to 95%			Operating: 35% to 95%			Operating: 35% to 95%		
<10%			<10%			<10%		
NO			NO			NO		
RFI>3V/m / EFT>1KV / ESD>4KV (contact)			RFI>3V/m / EFT>1KV / ESD>4KV (contact)			RFI>3V/m / EFT>1KV / ESD>4KV (contact)		
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2			IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2			IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2		
PBT			PBT			PBT		
OCN1-3010U-A2S2	11	OCN2-3015U-A2S2	OCN1-3010U-ABS4	57	OCN2-3015U-ABS4	OCN1-3010U-AUS3	58	OCN2-3015U-AUS3
OCN1-3010U-B2S2	12	OCN2-3015U-B2S2	OCN1-3010U-BBS4	57	OCN2-3015U-BBS4	OCN1-3010U-BUS3	58	OCN2-3015U-BUS3

Pigtail types

Note:
The standard cable length is 300mm. Any other length can be made by request.
The relevant part number is with suffix "P12", for example:

OCN1-3010U-A2S0.3/P12
M12 pigtail mode

M12 Connector face view

1-black
2-blue
3-not used
4-yellow/green(⏚)

1/2"-20 UNF Connector face view



1-yellow/green(⏚)
2-black
3-blue

5.8ϕ3x0.5		
Approx.270 g	Approx. 125 g	Approx. 125 g

Note:
Coming Soon : Part numbers with underline

AC/DC 2-WIRE HIGH TORQUE, STANDARD SENSING RANGE (SHORT BODY)

M30	
●	○
10.0	15.0
Nickel plated brass	
●	

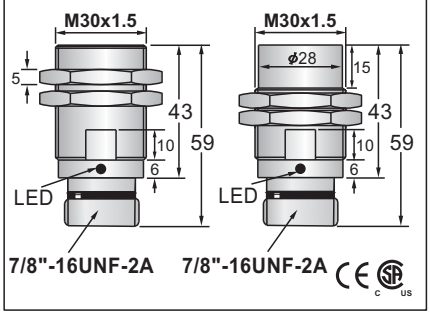

20-250 V AC/DC	
30x30x1 mm	54x54x1 mm
25 Hz	
1.7mA max.	
5... 300mA max.	
⩽ 15% of sensing distance	
IP67	
Operating:-25°C to 70°C	
Operating: 35% to 95%	
<10%	
NO	
RFI>3V/m / EFT>1KV / ESD>4KV (contact)	
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2	
PBT	

OCN1-3010U-AZS3	65	OCN2-3015U-AZS3
OCN1-3010U-BZS3	65	OCN2-3015U-BZS3

7/8"-16UNF-2A Connector face view



1-brown
2-yellow/green(⏚)
3-blue

Approx. 135 g

Note:
Coming Soon : Part numbers with underline